

Porcelain Design

STEP NOSING



Porcelain Tiles

3 colours | 1 size | 1 surface

Features:



7.4mm
THICKNESS



NON-RECTIFIED



V₁ VARIATION

Applications:



FLOOR



INDOOR



OUTDOOR

Surface:



N NATURAL


AVAILABLE COLOURS:



NS01N



NS02N

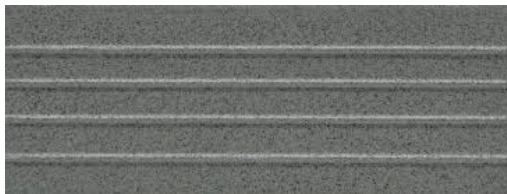

NS03N

TECHNICAL SPECIFICATIONS

| Technical Features | Standard Test | International Standard | JRC Standard |
|---|---------------|-------------------------------|-------------------------------|
| Dimensions & Surface Quality Properties | | | |
| Length & Width | ISO 10545-2 | ±0.6% Max ±2.0mm | ±0.3% Max ±2.0mm |
| Thickness | ISO 10545-2 | ±5.0% Max ±0.5mm | ±5.0% Max ±0.5mm |
| Straightness of sides | ISO 10545-2 | ±0.5% Max ±1.5mm | ±0.3% Max ±1.5mm |
| Rectangularity | ISO 10545-2 | ±0.5% Max ±2.0mm | ±0.3% Max ±2.0mm |
| Surface Flatness | ISO 10545-2 | ±0.5% Max ±2.0mm | ±0.3% Max ±2.0mm |
| Surface Quality | ISO 10545-2 | ≥95% free from visible defect | ≥95% free from visible defect |
| Physical Properties | | | |
| Water Absorption | ISO 10545-3 | Group B1a, E ≤ 0.5% | Group B1a, E ≤ 0.3% |
| Breaking Strength | ISO 10545-4 | Min 1300N | Min 1300N |
| Modulus of Rupture | ISO 10545-4 | Min 35N/mm ² | Min 36N/mm ² |
| Chemical Properties | | | |
| Resistance to household chemicals & swimming pool salts | ISO 10545-13 | Min Class GB | Class GB |
| Resistance to Stain | ISO 10545-14 | Min Class 3 | Min Class 3 |

PACKING LIST

| Sizes | pcs/ctn | ctn/plt | m ² /ctn | kg/ctn (approx.) | kg/plt (approx.) |
|--------------|---------|---------|---------------------|------------------|------------------|
| 197x75x7.5mm | 30 | 168 | 0.44 | 7.37 | 1238 |